


Time switch

Operating instructions

This boiler is provided with a time switch which allows to program the central heating cycle of the boiler during a 24 hour period.

Please note that the time switch:
operates the central heating cycle only;
is provided with a built in back-up battery that keeps its operation for about 150 hours in case of supply failure.

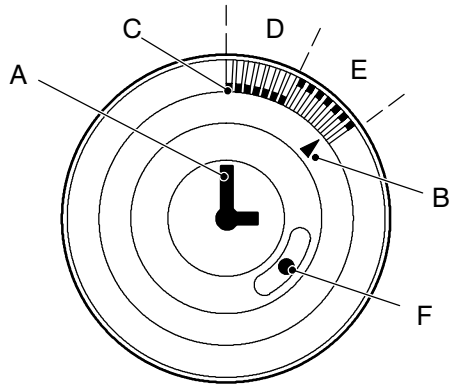

To enter the time

Turn the hand A clockwise until the indicator B corresponds with the current time indicated on the barrel.

To enter the activity periods of the central heating operation

Move the sectors C corresponding with the time in which the central heating operation is requested. Any individual sector corresponds to a 15 minutes time span.

In the sector D the central heating operation is OFF. In the sector E the central heating operation is ON.

Function selector

With the function selector F it is possible to select the function of the time switch without moving the pattern already selected.

With the selector in position 1 the central heating operation is switched continuously ON and it is controlled only by the room thermostat (if fitted).

With the selector F in position 0 the central heating operation is totally switched OFF.

With the selector F in position (central) the central heating operation is switched ON during the pattern set on the time switch.

