

BAXI FIRES DIVISION

AERATION SETTING ADDENDUM

This addendum is for the model 750 fireslide fitted with the **Obsession** fascia.

Please replace section **17.1** with the following.

17.1 Checking the aeration setting of the burner.

1. The aeration shutter is factory set for use with a 'pebble' ceramic fuel effect. It is important to ensure that the aeration setting is correct for the ceramic fuel effect used. Check the aeration shutter setting even if fitting the 'pebble' fuel effect (See figure 29).
2. To adjust the aeration setting to suit the fuel effect used, loosen the two shutter screws, slide the aeration shutter to the desired position and tighten the fixing screws.

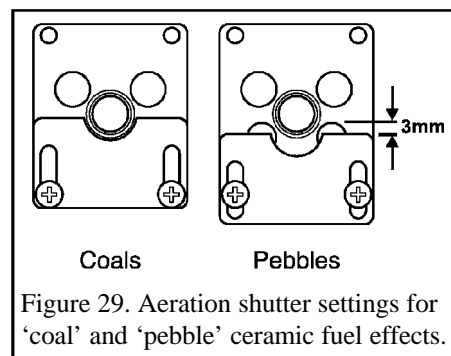


Figure 29. Aeration shutter settings for 'coal' and 'pebble' ceramic fuel effects.

BAXI FIRES DIVISION

AERATION SETTING ADDENDUM

This addendum is for the model 750 fireslide fitted with the **Obsession** fascia.

Please replace section **17.1** with the following.

17.1 Checking the aeration setting of the burner.

1. The aeration shutter is factory set for use with a 'pebble' ceramic fuel effect. It is important to ensure that the aeration setting is correct for the ceramic fuel effect used. Check the aeration shutter setting even if fitting the 'pebble' fuel effect (See figure 29).
2. To adjust the aeration setting to suit the fuel effect used, loosen the two shutter screws, slide the aeration shutter to the desired position and tighten the fixing screws.

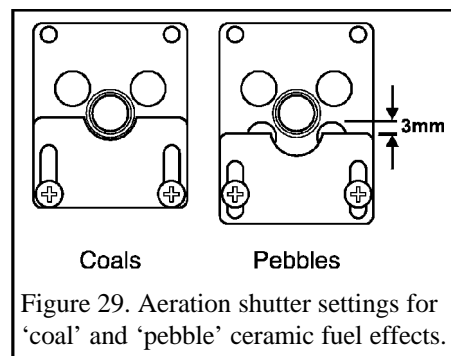


Figure 29. Aeration shutter settings for 'coal' and 'pebble' ceramic fuel effects.

BAXI FIRES DIVISION

AERATION SETTING ADDENDUM

This addendum is for the model 750 fireslide fitted with the **Obsession** fascia.

Please replace section **17.1** with the following.

17.1 Checking the aeration setting of the burner.

1. The aeration shutter is factory set for use with a 'pebble' ceramic fuel effect. It is important to ensure that the aeration setting is correct for the ceramic fuel effect used. Check the aeration shutter setting even if fitting the 'pebble' fuel effect (See figure 29).
2. To adjust the aeration setting to suit the fuel effect used, loosen the two shutter screws, slide the aeration shutter to the desired position and tighten the fixing screws.

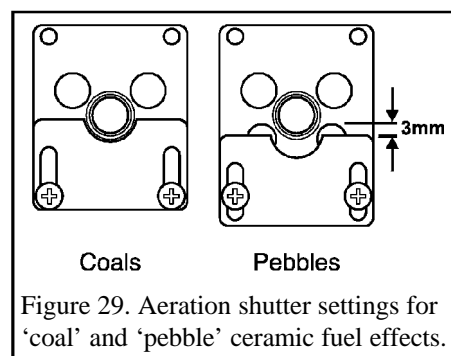


Figure 29. Aeration shutter settings for 'coal' and 'pebble' ceramic fuel effects.