


TECHNICAL INFORMATION

MANUFACTURERS WARRANTY

ALL STELRAD PRODUCTS IN THIS BROCHURE CARRY A FULL 5 YEAR WARRANTY WITH THE EXCEPTION OF ELECTRIC ELEMENTS WHICH HAVE A 1 YEAR WARRANTY.

DESIGN RANGE TYPES OF BRACKETS and number required

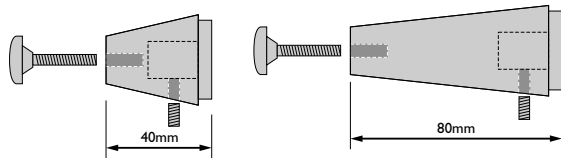


40MM BRACKET

80MM BRACKET

	40MM BRACKET	80MM BRACKET
OPTIA	3	-
WAVE	2	2
ARC	4	-
ESPRIT Curved	4	-
ESPRIT Straight	-	4
VISTALINE	4	-
ELLIPSE	4	-
EXCEL	4	-


DESIGN RANGE BRACKET ASSEMBLY

FOR: WAVE, ARC, ESPRIT, VISTALINE, ELLIPSE AND EXCEL Wall Mounted

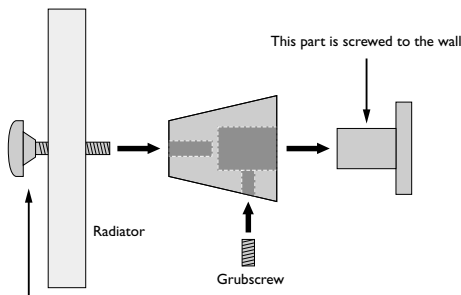

Domed headed screw fits through the radiator tubes and screws into conical piece. Conical piece then fits to the part screwed to the wall and is held in place using a grubscrew.


FOR: OPTIA

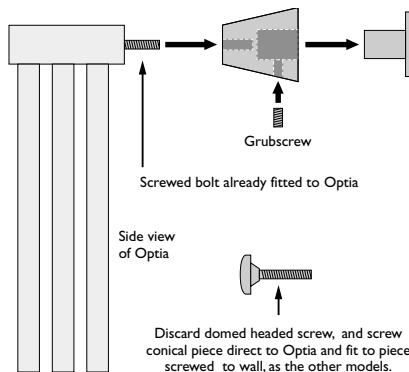


Discard domed headed screw, and screw conical piece direct to Optia and fit to piece screwed to wall, as the other models.

BRACKET POSITIONS


FOR: WAVE, ARC, LADDER TOWEL RAIL Curved, ESPRIT, VISTALINE, ELLIPSE, EXCEL Wall Mounted

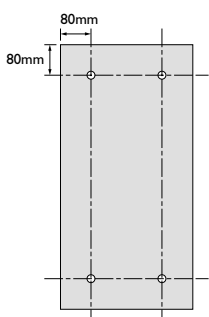

FOR: LADDER TOWEL RAIL Straight

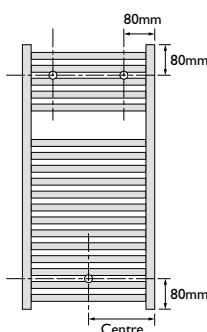


FOR: OPTIA

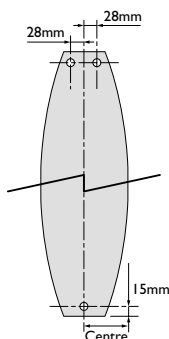

ELECTRIC ELEMENT OPTION

FOR: LADDER TOWEL RAIL ESPRIT

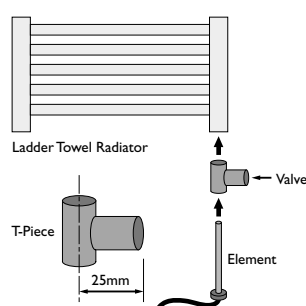

*Esprit models do not require a T-piece

STANDARD COLOUR AVAILABLE IN OTHER COLOURS

ESPRIT	White / Chrome	X
VISTALINE 2	White	✓
VISTALINE 3	White	✓
ELLIPSE EH	White	✓
ELLIPSE EOH	White	✓
EXCEL	RAL 9005	✓
WAVE	BR0007	X
ARC	BR0007	X
OPTIA	BR0007	X
COMO	White / Chrome	X
LECCO	White / Chrome	X
BERGAMO	White	X
LADDER TOWEL RAIL	White / Chrome	X
CLASSIC COLUMN	White	✓
CONCORD RANGE	White	✓
COMPACT WITH STYLE	White	X
PLANAR	White	X
LST 2	White	X
ELITE	White	X
STELRAD COMPACT	White	X

Special orders available on request.

COLOURS

RAL 7035	
RAL 7038	
RAL 7036	
RAL 7030	
RAL 7037	
RAL 7015	
RAL 9005	
RAL 1016	
RAL 1021	
RAL 1004	
RAL 2008	
RAL 3000	
RAL 3003	
RAL 3005	
RAL 6027	
RAL 6034	
RAL 6019	
RAL 6033	
RAL 6012	
RAL 6005	
RAL 5014	
RAL 5022	
RAL 5024	
RAL 5002	
RAL 5010	
RAL 9016	
RAL 9010	
RAL 9001	
RAL 1013	
RAL 1015	
RAL 9002	

Metallics

BR 0002	
BR 0004	
BR 0006	
BR 0007	
Chrome	

The colours shown above are reproduced as accurately as this printing process will allow and are available to special order only on these models.

Specials are subject to a 50% restock fee if returned



For the very latest copy of any of our literature for specification purposes please visit www.stelrad.com where you will be able to download the relevant information in pdf format



Caradon Stelrad Ltd Stelrad House, Marriott Road,
Swinton, Mexborough. S64 8BN

Tel: 0870 849 8056 Fax: 0870 849 8058
www.stelrad.com

S T E L R A D



P R O D U C T
P O R T F O L I O

T H E A R T O F C R E A T I V E

Whether you are looking for traditional solutions, or avant-garde design, you will find it within this all-encompassing collection/product range from Stelrad.

Every product can be delivered to order; rather than made to order; is offered at a realistic price, conforms to BS EN 442, the European Standard for radiators, and comes with a high performance guarantee. But with Stelrad you gain much more than quality product. You gain a wealth of experience and expertise that adds a range of useful accessories, technical information and advice, CPD Certified materials and of course a nationwide distribution network - but with the pedigree of this market leader, you wouldn't expect anything less.

From the UK's most popular panel radiators, to the inspirational, creative designs of unique space heaters, you can rest assured that technical excellence will not compromise on appearance, but provide total symmetry between aesthetics and engineering.

With a style and performance to suit every environment, be it domestic or commercial, the Stelrad collection/product range will stimulate your imagination. Take a quick glance through the following pages, then visit our website www.stelrad.com, call us on 0870 849 8056, or email us at specbrochure@stelradradiators.com to realize the full potential of this advanced approach to creative space heating.



ENGINEERING



Contents

- 4-5 Wave, Arc, Optia
- 6-7 Vistaline, Ellipse, Excel
- 8-9 Como, Lecco, Bergamo
- 10-11 Ladder Towel Rail, Esprit
- 12-13 Classic Column
- 14-15 Concord
- 16-17 Compact With Style
- 18-19 Planar
- 20-21 LST 2
- 22-23 Elite, Compact
- 24-27 Technical Information, Colours

T H E A R T O F C R E A T I V

Subtle elegance, created through sculptured lines, combine with precision engineering to create this inspirational group of space heaters. Available in a range of options for flexible siting, these contemporary creations can add a stunning focus to any room.

WAVE

The delicate appearance of the sculpted, undulating tubes of Wave, belie the excellent heating performance offered by this sophisticated space heater. With its soft curves and subtle metallic grey finish, Wave will complement any décor, offering distinctive style in a range of options that allow the flexibility to maximise wall space.

ARC

A subtle curve, formed from refined tubes, creates a graceful flow of pure performance that will enhance any surroundings, whilst providing efficient comfort. The elegant sweeping lines of Arc harmonise with the smooth metallic grey finish, making this contemporary design a perfect choice for a wide variety of applications.

OPTIA

With its radical approach to space heating, Optia offers the ultimate in design features, matched only by its optimum heating performance. This unique product, which is surprisingly simple to fit, offers the practical benefit of a towel warmer, whilst its innovative appearance can create a stunning focal point to enhance any interior.



Ε Η Ε Α Τ Ι Ο Ο



Optia

	HEIGHT mm	WIDTH mm	Btu/h* 150	WATT* 150
OPTIA	1800	160	2532	742
	1800	200	3167	928
	1800	240	3802	1114
WAVE	1800	380	3010	882
	1800	440	3484	1021
	1800	620	4908	1438
ARC	1800	380	3010	882
	1800	440	3484	1021
	1800	620	4908	1438



Wave

T H E A R T O F I N S P I R A T I O N

With a myriad of design alternatives and functional benefits, each of these featured models has something different to offer. Inspirational style, colours, finishes and design options are blended perfectly with efficient, high performance heating.

VISTALINE

Formed from slim vertical tubes, this elegant space heater offers a rainbow of colour choice to harmonise with any décor. Excellent heating performance comes as standard, but to ensure that heat output needs can accommodate the widest range, the Vistaline offers a model featuring an additional row of these inspirational tubes.

ELLIPSE

This truly inspirational design allows you to create a soft wave effect by alternating the soft curves of Ellipse with inward and outward presentation, or to take an elegant new approach to a vintage concept with all the columns facing outward. Add further inspiration by choosing from the wide range of colours or metallic finishes and set a new standard in heating design.

EXCEL





Stylish and slender; with a choice of colours and finishes, this space heater is full of inspiring ways to enhance office or living space, whilst providing excellent heating performance. This attractive design caters for wall or floor mounting, which means that the intricate lattice feature can provide a practical use as a space divider, blending with the décor in elegant simplicity. For details of floor mounting options contact 0870 849 8056.




For colour options see technical information.

AL HEATING



	HEIGHT mm	WIDTH mm	BUILT* E50	WATT* E50
VISTALINE 2 	1800	320	2532	742
	1800	440	3484	1021
	1800	620	4908	1438
	2000	500	4351	1275
	2000	620	5392	1580
	2000	740	6437	1886
VISTALINE 3 	1800	320	2792	818
	1800	440	3856	1130
	1800	620	5450	1597
	2000	500	4829	1415
	2000	620	6000	1758
ELLIPSE EH 	1800	459	2928	858
	1800	689	4392	1287
	2000	459	3256	954
	2000	689	4884	1431
	2000	765	5426	1590
ELLIPSE EOH 	1800	459	2928	858
	1800	689	4392	1287
	2000	459	3256	954
	2000	689	4884	1431
	2000	765	5426	1590
EXCEL	1800	380	2481	727
	2000	500	3266	957
Wall Mounted	1800	380	2481	727
	2000	500	3266	957
Floor Mounted	1800	380	2481	727
	2000	500	3266	957



T H E A R T O F S E D U C T I V E

Combining Italian design flair with Stelrad performance, this exciting deluxe range of towel warmers creates a seductive style and comfort, whilst offering a range of sizes and outputs to accommodate any kitchen, domestic en-suite, or commercial bathroom application.

COMO

The classic ladder style of the Como deluxe towel warmer is manufactured to a superior finish and engineered to provide practical and efficient high performance heating. Offered in chrome or warm white, to blend in with any surroundings, the pristine appearance of this deluxe towel warmer would be welcomed in the grandest of bathrooms.

LECCO

With its striking tube on tube design and advanced heating performance, Lecco provides a stimulating alternative for any bathroom application. Providing elegance and comfort, Lecco boasts practical design features that make it simple to replace existing radiators, making it the perfect choice to add a hint of luxury, without compromise to function.

BERGAMO

This extraordinary deluxe model creates a perception of serenity with its sleek, warm white appearance. Hidden beneath the unusual design of Bergamo's flat rails, which offer an abundance of towel drying space, is a strength and performance that can only come from precision engineering, providing outstanding space heating, even in the largest of bathroom applications.



Ε Η Ε Α Τ Ι Ο Ο



	HEIGHT mm	WIDTH mm	Btu/h* E50	WATT* E50
COMO	733	500	1478	433
White	1133	500	2263	663
	1133	600	2508	735
	1733	600	3795	1112
COMO	733	500	1034	303
Chrome	1133	500	1584	464
	1133	600	1754	514
	1733	600	2655	778
LECCO	733	500	1508	442
White	1133	500	2201	645
	1133	600	2642	774
	1733	600	3771	1105
LECCO	733	500	1055	309
Chrome	1133	500	1543	452
	1133	600	1850	542
	1733	600	2642	774
BERGAMO	740	500	1283	376
White	1172	500	1982	581
	1730	500	2685	787
	740	600	1535	450
	1172	600	2354	690
	1730	600	3207	940



Now available as special order.

T H E A R T O F F U N C T I O N A

With efficient space heating and drying performance, this range of towel rails is not only attractive but functional. Models are available in warm white or sparkling chrome, with a choice of sizes and outputs to suit all types of kitchens and bathrooms.

LADDER TOWEL RAIL

This ladder towel rail provides plenty of space for drying towels and with its simple, yet strikingly attractive design, lends itself to both domestic and commercial applications. Models are available with conventional straight rails, or a softer curved option, to suit individual taste and style.

ESPRIT

Practical in its classic ladder style, Esprit shows a touch of added sophistication. With its slim, refined tubes it presents elegance and efficiency, whilst the option of a subtle curve makes this a chic alternative for kitchens, cloakrooms or bathrooms.



L H E A T I N G



	HEIGHT mm	WIDTH mm	BUILT-IN 50	WATT* 50
LADDER TOWEL RAIL	760	500	1251	367
	760	600	1498	439
	1211	500	1858	545
Straight White	1211	600	2206	646
	1744	500	2743	804
	1744	600	3244	951
LADDER TOWEL RAIL	760	500	1042	305
	760	600	1248	366
	1211	500	1548	454
Straight Chrome	1211	600	1837	539
	1744	500	2285	670
	1744	600	2703	792
LADDER TOWEL RAIL	760	500	1345	394
	760	600	1611	472
	1211	500	1998	586
Curved White	1211	600	2372	695
	1744	500	2949	864
	1744	600	3489	1022
LADDER TOWEL RAIL	760	500	1120	328
	760	600	1342	393
	1211	500	1665	488
Curved Chrome	1211	600	1976	579
	1744	500	2457	720
	1744	600	2906	852
MINI Straight White	678	400	983	288
MINI Straight Chrome	678	400	820	240
ESPRIT	900	450	1382	405
	1200	450	1891	554
White	1200	550	2307	676
	1800	550	3604	1056
ESPRIT	900	450	1078	316
	1200	450	1474	432
Chrome	1200	550	1799	527
	1800	550	2812	824
ESPRIT CURVED	900	550	1679	492
	1200	550	2307	676
White	1500	550	2935	860
	1800	550	3604	1056
ESPRIT CURVED	900	550	1311	384
	1200	550	1799	527
Chrome	1500	550	2290	671
	1800	550	2812	824



T H E A R T O F P R O V O C A T I V E

Taking a traditional concept to its full capability, through provocative thought processes, this classic design brings innovation to a sturdy and reliable form of space heating, providing versatile sizing flexibility for a wide range of applications.

CLASSIC COLUMN

The strength of a steel construction is matched by outstanding heating performance, offered with contemporary design options for a progressive new approach to classic style.

With a choice of two, three or four columns, in an extensive range of heights and lengths, including vertical models, this steel column radiator is ideal for use in a minimalist project, or for applications where wall space is restricted.

Add colour from a wide choice of BS or RAL options to harmonize with the boldest, or most neutral, of décors, accentuate the use of traditional materials or enhance a minimalist or period appearance and this Classic Column can be used to complement the most contemporary of warehouse conversions, provide compatibility with a period refurbishment, or help fortify the most modern of new build designs.



Classic Column Vertical

For colour options see technical information.

HEATING



Classic Column Standard



Classic Column Standard

Classic Column Chrome



Now available as special order.

	HEIGHT mm	WIDTH mm	NO. OF COLUMNS	Built* £50	WATT* £50	
CLASSIC COLUMN	300	405	3	952	279	
	300	585	3	1375	403	
	Standard	300	810	3	1904	558
		300	990	3	2327	682
		300	1215	3	2856	837
		300	1395	3	3279	961
		300	1800	3	4231	1240
		300	405	4	1228	360
		300	585	4	1774	520
		300	810	4	2457	720
		300	990	4	3003	880
		300	1215	4	3685	1080
500	585	2	1641	481		
500	810	2	2272	666		
500	1215	2	3409	999		
500	405	3	1566	459		
500	585	3	2262	663		
500	810	3	3132	918		
500	990	3	3828	1122		
500	1215	3	4698	1377		
500	1395	3	5394	1581		
500	1800	3	6960	2040		
500	405	4	1996	585		
500	585	4	2883	845		
500	810	4	3992	1170		
500	990	4	4879	1430		
500	1215	4	5988	1755		
600	585	2	1952	572		
600	810	2	2702	792		
600	990	2	3303	968		
600	1215	2	4053	1188		
600	405	3	1842	540		
600	585	3	2661	780		
600	810	3	3685	1080		
600	990	3	4504	1320		
600	1215	3	5527	1620		
600	1395	3	6346	1860		
600	1800	3	8189	2400		
600	405	4	2365	693		
600	585	4	3415	1001		
600	810	4	4729	1386		
600	990	4	5780	1694		
600	1215	4	7094	2079		
750	810	3	4606	1350		
750	990	3	5630	1650		
750	1215	3	6909	2025		
750	1395	3	7933	2325		
750	1800	3	10236	3000		
750	405	4	2917	855		
750	585	4	4214	1235		
750	810	4	5835	1710		
750	990	4	7131	2090		
750	1215	4	8752	2565		
CLASSIC COLUMN	1800	315	2	2986	875	
	1800	405	2	3839	1125	
Vertical	2000	315	2	3344	980	
	2000	405	2	4299	1260	
	2500	315	2	4156	1218	
	2500	405	2	5343	1566	

T H E A R T O F C R E A T I V E T

Offering visual appeal combined with advanced technology, the Concord Range of radiators provides a contemporary solution for a huge spectrum of applications. With a choice of four types and a variety of sizes and outputs, Concord allows extensive flexibility of siting, whilst breaking new barriers in heating efficiency.

CONCORD PLANE

Constructed from slim, flat tubes, which lie horizontally, the Concord Plane offers a new vision for radiators.

CONCORD LO-LINE

With only two panels, this lo-line model is a derivative of the Plane, but offers efficiency of performance that belies its size.

CONCORD VERTICAL

This resourceful alternative takes the same, highly engineered tubes and turns technology on its head, to provide a vertical model.

CONCORD SLIMLINE

With all the benefits of the Vertical model, the Concord Slimline offers a subtle change in visual appeal, exhibiting the slim form of the tubes.

Whatever your application requirements, you can be sure that this advanced range of space heaters offers total symmetry between aesthetics and engineering.



Concord Vertical

For colour options see technical information. Optional floor mounting brackets available to order.

E C H N O L O G Y



Concord Slimline



Concord Plane Double



Concord Lo-Line

	HEIGHT mm	WIDTH RANGE mm		
			SINGLE	DOUBLE
CONCORD	440	500-3000	✓	✓
Plane	588	500-3000	✓	✓
	736	500-3000	✓	✓

For full output information see page 25

	HEIGHT mm	WIDTH mm		
			Baufl [®] €50	WATT [®] €50
CONCORD	144	800	1810	530
Lo-Line	144	1000	2263	663
	144	1200	2715	796
	144	1400	3168	928
	144	1600	3620	1061
	144	1800	4073	1193
	144	2000	4525	1326
	144	2200	4978	1459
	292	800	3063	898
	292	1000	3829	1122
	292	1200	4595	1346
	292	1400	5361	1571
	292	1600	6127	1795
	292	1800	6892	2020
	292	2000	7658	2244
292	2200	8424	2468	

	HEIGHT mm	WIDTH mm		
			Baufl [®] €50	WATT [®] €50
CONCORD	1800	440	3706	1086
Vertical	1800	588	4942	1448
	1800	736	6177	1810
	2000	588	4375	1282
	2000	736	5471	1603
	2000	884	5938	1740

	HEIGHT mm	WIDTH mm		
			Baufl [®] €50	WATT [®] €50
CONCORD	1800	320	2976	872
Slimline	1800	440	4092	1199
	1800	520	4836	1417
	1800	640	5952	1744
	2000	320	3338	978
	2000	440	4587	1344
	2000	520	5423	1589
	2000	640	6675	1956

T H E A R T O F R E N A I S S A N C E

Working to a budget can restrict choices and design flair, but this progressive approach to traditional radiators provides the perfect solution. Add a new dimension to a room with this stylish design and bridge the gap between standard and more expensive designer models.

COMPACT WITH STYLE

With its subtle, fine lined surface, complemented by an elegant top grille and side panels, this superbly finished radiator adds style to any interior.

With a range of sizes and outputs to suit the most challenging of applications, the Compact With Style offers vertical and lo-line models, as well as standard, enabling wall and room space to be put to maximum use.

Guaranteed reliability and outstanding heating performance lies beneath the attractive appearance, providing the perfect balance between style and efficiency without stretching your budget.



C E H E A T I N G



Compact with Style Standard

	HEIGHT mm	WIDTH mm	K1		K2	
			Bauh** t50	WATT* t50	Bauh** t50	WATT* t50
COMPACT WITH STYLE	300	500	768	225	1483	435
	300	1000	1535	450	2965	869
	300	1400	2150	630	4151	1217
Standard	300	2000	3071	900	5930	1738
	500	400	991	290	1755	514
	500	600	1486	436	2633	772
	500	800	1982	581	3510	1029
	500	1000	2477	726	4388	1286
	500	1200	2973	871	5265	1543
	500	1400	3468	1016	6143	1800
	500	1600	3963	1162	7021	2058
	500	1800	4459	1307	7898	2315
	500	2000	4954	1452	8776	2572
	600	400	1156	339	2036	597
	600	600	1734	508	3054	895
	600	800	2312	678	4073	1194
	600	1000	2890	847	5091	1492
	600	1200	3468	1016	6109	1790
	600	1400	4046	1186	7127	2089
	600	1600	4624	1355	8145	2387
	600	1800	5202	1525	9163	2686
600	2000	5780	1694	10181	2984	

	HEIGHT mm	WIDTH mm	P+		K2	
			Bauh** t50	WATT* t50	Bauh** t50	WATT* t50
COMPACT WITH STYLE	200	500	824	242	1047	307
	200	1000	1648	483	2095	614
	200	1400	2307	676	2933	860
Lo-Line	200	2000	3296	966	4190	1228

	HEIGHT mm	WIDTH mm	P2	
			Bauh** t50	WATT* t50
COMPACT WITH STYLE	1600	300	2412	707
	1600	500	3624	1062
	1600	600	4190	1228
Vertical	1800	300	2678	785
	1800	500	4026	1180
	1800	600	4654	1364
	2000	300	2941	862
	2000	500	4419	1295
	2000	600	5111	1498
	2400	300	3450	1011
	2400	500	5186	1520
	2400	600	5995	1757



Compact with Style Lo-Line

T H E A R T O F F L E X I B L E

Demanding applications often lead to compromise on design, performance, or both! But with this superb range of space heaters there is no conflict, as it offers total installation flexibility, combined with elegance and outstanding heating performance.

PLANAR

Specifically designed to facilitate piping flexibility, this range balances elegant sophistication with true versatility to accommodate the most demanding of applications.

Six tappings on the Planar allow the addition of integrated valve systems, with each model supplied fully assembled for ease of installation. And as you would expect from a market leader there is a wide range of sizes and outputs to provide outstanding performance. For full details see our Planar technical brochure.

With its exceptionally slim, attractive profile, smooth silk finish and integrated top grille and side panels, this elegant radiator provides a versatile alternative to panel radiators for all environments.



HEATING



PLANAR	HEIGHT mm	WIDTH mm	K1		K2	
			Bruh* 50	WATT* 50	Bruh* 50	WATT* 50
	300	500	800	235	1585	465
	300	1000	1600	469	3170	929
	300	1400	2240	657	4438	1301
	300	2000	3200	938	6339	1858
	400	400	854	250	1606	471
	400	600	1282	376	2410	706
	400	800	1709	501	3213	942
	400	1000	2136	626	4016	1177
	400	1200	2563	751	4819	1412
	400	1400	2990	876	5622	1648
	400	1600	3417	1002	6425	1883
	400	1800	3845	1127	7229	2119
	400	2000	4272	1252	8032	2354
	500	400	1056	310	1926	564
	500	600	1585	464	2889	847
	500	800	2113	619	3851	1129
	500	1000	2641	774	4814	1411
	500	1200	3169	929	5777	1693
	500	1400	3697	1084	6740	1975
	500	1600	4225	1238	7703	2258
	500	1800	4754	1393	8666	2540
	500	2000	5282	1548	9629	2822
	600	400	1243	364	2230	654
	600	600	1865	547	3345	980
	600	800	2487	729	4460	1307
	600	1000	3108	911	5575	1634
	600	1200	3730	1093	6690	1961
	600	1400	4352	1275	7805	2288
	600	1600	4973	1458	8920	2614
	600	1800	5595	1640	10035	2941
	600	2000	6217	1822	11150	3268



T H E A R T O F C O M P A S S I O N

Created with consideration to performance, safety, cost, straightforward specification and installation, not to mention appearance, this exceptional range offers a host of specialised features for public, commercial and domestic environments.


LST 2

Created with foresight and imagination the LST 2 performs to the highest of criteria, hiding a host of integrated features behind the attractive outer casing.

Fully reversible, to allow for piping flexibility, the outer casing is smooth and flat to enhance even the most exclusive of hotel lobbies or public offices. Underneath lies a high performance emitter, combined with an integrated remote sensing thermostat* and lockshield valve, plus a host of additional, inspired safety features.

All of this and more, supplied as standard in a complete, pre-assembled package, resulting in straightforward specification, simple product selection and installation, significantly reducing cost.

Offering exceptional performance and neat, good looks, the LST 2 is fully compliant with all safety standards and meets the strict requirements of the NHS Guidance Note for "Safe Hot Water and Surface Temperature", making it ideal for use in safety critical environments, working as a low surface temperature radiator.

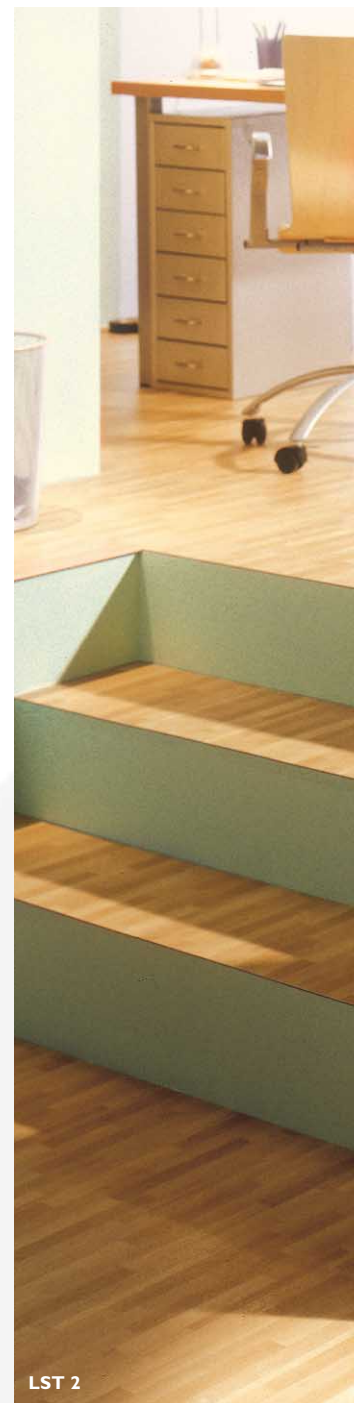

LST 2


* Please note that the remote thermostat should be re-positioned at the bottom of the front kickgrille during installation.

A T E H E A T I N G



	HEIGHT mm		WIDTH mm		K1		P+		K2	
			Bau/ht° C50	WATT° C50	Bau/ht° C50	WATT° C50	Bau/ht° C50	WATT° C50	Bau/ht° C50	WATT° C50
LST 2	500	650	692	203	989	290	1234	362		
Wall Mounted with Integral Kick Grille	500	850	1038	304	1484	435	1851	542		
Overall Height 500mm	500	1050	1384	406	1979	580	2468	723		
	500	1250	1730	507	2474	725	3084	904		
	500	1450	2076	608	2968	870	3701	1085		
	500	1650	2422	710	3463	1015	4318	1266		
	500	1850	2768	811	3958	1160	4935	1446		
	500	2050	3114	913	4453	1305	5552	1627		
LST 2	500	650	902	264	1322	388	1557	456		
Wall Mounted with 500mm Casing and Kick Grille - Overall Height 650mm	500	850	1353	397	1984	581	2336	685		
	500	1050	1804	529	2645	775	3114	913		
	500	1250	2255	661	3306	969	3893	1141		
	500	1450	2706	793	3967	1163	4671	1369		
	500	1650	3157	925	4629	1357	5450	1597		
	500	1850	3609	1058	5290	1550	6228	1825		
	500	2050	4060	1190	5951	1744	7007	2054		
LST 2	600	650	1145	336	1574	461	1904	558		
Wall Mounted with 600mm Casing and 150mm Kick Grille - Overall Height 750mm	600	850	1718	503	2360	692	2855	837		
	600	1050	2290	671	3147	922	3807	1116		
	600	1250	2863	839	3934	1153	4759	1395		
	600	1450	3435	1007	4721	1384	5711	1674		
	600	1650	4008	1175	5508	1614	6663	1953		
	600	1850	4580	1342	6294	1845	7614	2232		
	600	2050	5153	1510	7081	2075	8566	2511		

LST 2 Dimensions

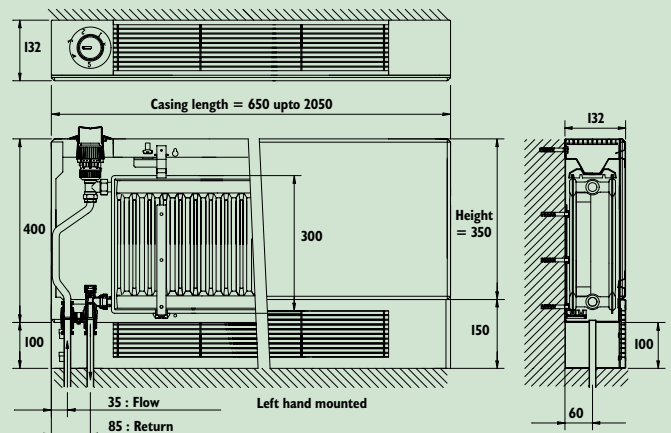

T H E A R T O F D E P E N D A B

Incorporating the respected values, aesthetic innovation, outstanding quality and performance synonymous with the brand, the Stelrad Elite and Stelrad Compact provide exceptional heating performance in a huge range of models.

STELRAD ELITE

A perfect finish, exceptional heating performance and simple installation have made Stelrad Elite the UK's most popular panel radiator.

With a range of 216 models, including one of the smallest and one of the slimmest radiators on the market, Stelrad Elite provides extra sizing flexibility for a multitude of application needs.

Flexibility of installation is enhanced still farther, through a range of specifically designed accessories, such as floor standing brackets, to overcome situations such as tiled walls easily.

STELRAD COMPACT

With its excellently engineered integrated top grille and side panels, specifically designed to eradicate any movement, the Stelrad Compact offers a great enhancement to standard panel radiators.

The Compact Vertex is ideal for applications where wall space is at a premium, whilst the Stelrad Compact Towel Rail, offers a practical alternative, perfect for use in bathrooms and cloakrooms.

With over 233 models and a range of accessories, this popular range of radiators provides flexibility and style to fit the most challenging of application requirements.



LE HEATING



	HEIGHT mm	WIDTH RANGE mm	K1	P+	K2	P1
ELITE	300	500-3000	✓	✓	✓	
	450	400-3000	✓	✓	✓	✓
	600	400-3000	✓	✓	✓	✓
	700	400-3000	✓	✓	✓	✓





For full output information see page 26

	HEIGHT mm	WIDTH RANGE mm	K1	P+	K2	P1
COMPACT	300	500-3000	✓	✓	✓	
	450	400-3000	✓	✓	✓	✓
	600	400-3000	✓	✓	✓	✓
	700	400-3000	✓	✓	✓	✓

For full output information see page 26



	HEIGHT mm	WIDTH mm	Bauh* 50	WATT* 50	TAPPING CENTRES mm	CENTRES FROM WALL mm	MAX. PROJECTION mm	WEIGHT mm	WATER CONTENTS ltrs
OPTIA	1800	160	2532	742	50	42	202	9	2.51
	1800	200	3167	928	50	42	242	11	3.06
	1800	240	3802	1114	50	42	282	13	3.61
WAVE	1800	380	3010	882	340	60	120	10	3.05
	1800	440	3484	1021	400	60	120	13	3.52
	1800	620	4908	1438	580	60	120	14	4.97
ARC	1800	380	3010	882	340	42	200	10	3.05
	1800	440	3484	1021	400	42	200	13	3.52
	1800	620	4908	1438	580	42	200	14	4.97

	HEIGHT mm	WIDTH mm	Bauh* 50	WATT* 50	TAPPING CENTRES mm	CENTRES FROM WALL mm	MAX. PROJECTION mm	WEIGHT mm	WATER CONTENTS ltrs
VISTALINE 2 	1800	320	2532	742	280	42	60	8	2.57
	1800	440	3484	1021	400	42	60	11	3.52
	1800	620	4908	1438	580	42	60	16	4.97
	2000	500	4351	1275	460	42	60	14	4.41
	2000	620	5392	1580	580	42	60	17	5.46
	2000	740	6437	1886	700	42	60	17	6.52
VISTALINE 3 	1800	320	2792	818	280	48	66	10	3.22
	1800	440	3856	1130	400	48	66	14	4.42
	1800	620	5450	1597	580	48	66	20	6.23
	2000	500	4829	1415	460	48	66	18	5.54
	2000	620	6000	1758	580	48	66	22	6.86
ELLIPSE EH 	1800	459	2928	858	419	46	65	17	4.6
	1800	689	4392	1287	649	46	65	22	6.9
	2000	459	3256	954	419	46	65	26	5.07
	2000	689	4884	1431	649	46	65	19	7.61
	2000	765	5426	1590	725	46	65	29	8.45
ELLIPSE EOH 	1800	459	2928	858	419	46	65	17	4.6
	1800	689	4392	1287	649	46	65	22	6.9
	2000	459	3256	954	419	46	65	26	5.07
	2000	689	4884	1431	649	46	65	19	7.61
	2000	765	5426	1590	725	46	65	29	8.45
EXCEL Wall Mounted	1800	380	2481	727	340	42	60	10	1.83
	1800	500	3266	957	460	42	60	13	2.41
	2000	500	3577	1048	460	42	60	14	2.68
	2000	500	3577	1048	460	42	60	14	2.68
EXCEL Floor Mounted	1800	380	2481	727	340	42	60	10	1.83
	1800	500	3266	957	460	42	60	13	2.41
	2000	500	3577	1048	460	42	60	14	2.68
	2000	500	3577	1048	460	42	60	14	2.68

ACCESSORIES

CHROME ROBE HOOKS

FOR: VISTALINE, ELLIPSE AND ESPRIT



ADDITIONAL TOWEL RAIL

30CM, 40CM, 46CM OR 62MM

FOR: VISTALINE, ELLIPSE AND ESPRIT



DRYING & STACKING RAIL

55CM

FOR: VISTALINE AND ELLIPSE.



PLEASE NOTE:

STELRAD PRODUCTS ARE NOT SUITABLE FOR DIRECT SYSTEMS.

	HEIGHT mm	WIDTH mm	Bauh* 50	WATT* 50	TAPPING CENTRES mm	CENTRES FROM WALL mm	MAX. PROJECTION mm	WEIGHT mm	WATER CONTENTS ltrs	ELEMENT
LADDER TOWEL RAIL	760	500	1251	367	450	70-90	100	7.82	3.77	300
	760	600	1498	439	550	70-90	100	8.44	4.55	300
	1211	500	1858	545	450	70-90	100	12.22	6	600
	1211	600	2206	646	550	70-90	100	13.85	7.02	600
Straight White	1744	500	2743	804	450	70-90	100	20.62	8.63	600
	1744	600	3244	951	550	70-90	100	20.62	10.14	600
	760	500	1042	305	450	70-90	100	7.4	3.77	300
	760	600	1248	366	550	70-90	100	8.6	4.55	300
Straight Chrome	1211	500	1548	454	450	70-90	100	12	6	300
	1211	600	1837	539	550	70-90	100	13.6	7.02	600
	1744	500	2285	670	450	70-90	100	20.62	8.63	600
	1744	600	2703	792	550	70-90	100	20.62	10.14	600
LADDER TOWEL RAIL	760	500	1345	394	450	70-90	100	8.3	3.77	300
	760	600	1611	472	550	70-90	100	9.6	4.55	300
	1211	500	1998	586	450	70-90	100	11.7	6	600
	1211	600	2372	695	550	70-90	100	13.6	7.02	600
Curved White	1744	500	2949	864	450	70-90	100	15.1	8.63	600
	1744	600	3489	1022	550	70-90	100	17.5	10.14	600
	760	500	1120	328	450	70-90	100	8.3	3.77	300
	760	600	1342	393	550	70-90	100	9.6	4.55	300
Curved Chrome	1211	500	1665	488	450	70-90	100	11.7	6	300
	1211	600	1976	579	550	70-90	100	13.6	7.02	600
	1744	500	2457	720	450	70-90	100	15.1	8.63	600
	1744	600	2906	852	550	70-90	100	17.5	10.14	600
MINI Straight White	698	400	983	288	350	70-90	100	6.41	2.8	-
MINI Straight Chrome	698	400	820	240	350	70-90	100	6.34	2.8	-

ESPRIT	900	450	1382	405	310	80	100	6	1.79	350
	1200	450	1891	554	310	80	100	8	2.46	650
	1200	550	2307	676	410	80	100	9	2.79	650
	1800	550	3604	1056	410	80	100	14	4.3	900
White	900	450	1078	316	310	80	100	6	1.79	350
	1200	450	1474	432	310	80	100	8	2.46	350
	1200	550	1799	527	410	80	100	9	2.79	350
	1800	550	2812	824	410	80	100	14	4.3	900
Chrome	900	550	1679	492	410	40	75	6	2.03	350
	1200	550	2307	676	410	40	75	9	2.79	650
	1500	550	2935	860	410	40	75	11	3.54	900
	1800	550	3604	1056	410	40	75	14	4.3	900
ESPRIT CURVED	900	550	1311	384	410	40	75	6	2.03	350
	1200	550	1799	527	410	40	75	9	2.79	350
	1500	550	2290	671	410	40	75	11	3.54	650
	1800	550	2812	824	410	40	75	14	4.3	900

COMO	733	500	1478	433	475	52	87	8.9	4.5	300
	1133	500	2263	663	475	52	87	13.8	6.95	600
	1133	600	2508	735	575	52	87	15.9	8	600
	1733	600	3795	1112	575	52	87	23.9	12	600
White	733	500	1034	303	475	52	87	8.9	4.5	300
	1133	500	1584	464	475	52	87	13.8	6.95	300
	1133	600	1754	514	575	52	87	15.9	8	300
	1733	600	2655	778	575	52	87	23.9	12	600
Chrome	733	500	1508	442	475	52	79	11.9	6	300
	1133	500	2201	645	475	52	79	18	9	600
	1133	600	2642	774	575	52	79	20.9	10.5	600
	1733	600	3771	1105	575	52	79	27.6	13.9	600
LECCO	733	500	1055	309	475	52	79	11.9	6	300
	1133	500	1543	452	475	52	79	18	9	300
	1133	600	1850	542	575	52	79	20.9	10.5	600
	1733	600	2642	774	575	52	79	27.6	13.9	600
White	740	500	1283	376	470	45	80	9.15	2.75	300
	1172	500	1982	581	470	45	80	14.3	4.31	600
	1730	500	2685	787	470	45	80	19.5	6.33	600
	740	600	1535	450	570	45	80	10.8	3.22	300
Chrome	1172	600	2354	690	570	45	80	16.9	5.05	600
	1730	600	3207	940	570	45	80	23	7.33	600

	HEIGHT mm	WIDTH mm	NO. OF COLUMNS	Bsullit* £50	WATT* £50
CLASSIC COLUMN	300	405	3	952	279
	300	585	3	1375	403
Standard	300	810	3	1904	558
	300	990	3	2327	682
	300	1215	3	2856	837
	300	1395	3	3279	961
	300	1800	3	4231	1240
	300	405	4	1228	360
	300	585	4	1774	520
	300	810	4	2457	720
	300	990	4	3003	880
	300	1215	4	3685	1080
	500	585	2	1641	481
	500	810	2	2272	666
	500	990	2	2777	814
	500	1215	2	3409	999
	500	405	3	1566	459
	500	585	3	2262	663
	500	810	3	3132	918
	500	990	3	3828	1122
	500	1215	3	4698	1377
	500	1395	3	5394	1581
	500	1800	3	6960	2040
	500	405	4	1996	585
	500	585	4	2883	845
	500	810	4	3992	1170
	500	990	4	4879	1430
	500	1215	4	5988	1755
	600	585	2	1952	572
	600	810	2	2702	792
	600	990	2	3303	968
	600	1215	2	4053	1188
	600	405	3	1842	540
	600	585	3	2661	780
	600	810	3	3685	1080
	600	990	3	4504	1320
	600	1215	3	5527	1620
	600	1395	3	6346	1860
	600	1800	3	8189	2400
	600	405	4	2365	693
	600	585	4	3415	1001
	600	810	4	4729	1386
	600	990	4	5780	1694
	600	1215	4	7094	2079
	750	810	3	4606	1350
	750	990	3	5630	1650
	750	1215	3	6909	2025
	750	1395	3	7933	2325
	750	1800	3	10236	3000
	750	405	4	2917	855
	750	585	4	4214	1235
	750	810	4	5835	1710
	750	990	4	7131	2090
	750	1215	4	8752	2565
CLASSIC COLUMN	1800	315	2	2986	875
	1800	405	2	3839	1125
Vertical	2000	315	2	3344	980
	2000	405	2	4299	1260
	2500	315	2	4156	1218
	2500	405	2	5343	1566

	HEIGHT mm	WIDTH mm	Bsullit* £50	WATT* £50
CONCORD	440	500	1304	382
	440	600	1564	458
Plane Single	440	700	1825	535
	440	800	2086	611
	440	900	2347	688
	440	1000	2607	764
	440	1100	2868	840
	440	1200	3129	917
	440	1400	3650	1070
	440	1600	4172	1222
	440	1800	4693	1375
	440	2000	5215	1528
	440	2200	5736	1681
	440	2400	6258	1834
	440	2600	6779	1986
	440	2800	7301	2139
	440	3000	7822	2292
	588	500	1705	500
	588	600	2046	599
	588	700	2387	699
	588	800	2728	799
	588	900	3068	899
	588	1000	3409	999
	588	1100	3750	1099
	588	1200	4091	1199
	588	1400	4773	1399
	588	1600	5455	1598
	588	1800	6137	1798
	588	2000	6819	1998
	588	2200	7501	2198
	588	2400	8183	2398
	588	2600	8864	2597
	588	2800	9546	2797
	588	3000	10228	2997
	736	500	2068	606
	736	600	2482	727
	736	700	2895	848
	736	800	3309	970
	736	900	3723	1091
	736	1000	4136	1212
	736	1100	4550	1333
	736	1200	4964	1454
	736	1400	5791	1697
	736	1600	6618	1939
	736	1800	7445	2182
	736	2000	8273	2424
	736	2200	9100	2666
	736	2400	9927	2909
	736	2600	10754	3151
	736	2800	11582	3394
	736	3000	12409	3636
CONCORD	144	800	1810	530
	144	1000	2263	663
Lo-line	144	1200	2715	796
	144	1400	3168	928
	144	1600	3620	1061
	144	1800	4073	1193
	144	2000	4525	1326
	144	2200	4978	1459
	292	800	3063	898
	292	1000	3829	1122
	292	1200	4595	1346
	292	1400	5361	1571
	292	1600	6127	1795
	292	1800	6892	2020
	292	2000	7658	2244
	292	2200	8424	2468

	HEIGHT mm	WIDTH mm	Bsullit* £50	WATT* £50
CONCORD	440	500	2297	673
	440	600	2756	808
Plane Double	440	700	3216	942
	440	800	3675	1077
	440	900	4134	1211
	440	1000	4594	1346
	440	1100	5053	1481
	440	1200	5512	1615
	440	1400	6431	1884
	440	1600	7350	2154
	440	1800	8269	2423
	440	2000	9187	2692
	440	2200	10106	2961
	440	2400	11025	3230
	440	2600	11943	3500
	440	2800	12862	3769
	440	3000	13781	4038
	588	500	2822	827
	588	600	3387	992
	588	700	3951	1158
	588	800	4516	1323
	588	900	5080	1489
	588	1000	5645	1654
	588	1100	6209	1819
	588	1200	6774	1985
	588	1400	7903	2316
	588	1600	9032	2646
	588	1800	10161	2977
	588	2000	11290	3308
	588	2200	12418	3639
	588	2400	13547	3970
	588	2600	14676	4300
	588	2800	15805	4631
	588	3000	16934	4962
	736	500	3570	1046
	736	600	4284	1255
	736	700	4998	1464
	736	800	5712	1674
	736	900	6426	1883
	736	1000	7140	2092
	736	1100	7854	2301
	736	1200	8567	2510
	736	1400	9995	2929
	736	1600	11423	3347
	736	1800	12851	3766
	736	2000	14279	4184
	736	2200	15707	4602
	736	2400	17135	5021
	736	2600	18563	5439
	736	2800	19991	5858
	736	3000	21419	6276
CONCORD	1800	320	2976	872
	1800	440	4092	1199
Slimline	1800	520	4836	1417
	1800	640	5952	1744
	2000	320	3338	978
	2000	440	4587	1344
	2000	520	5423	1589
	2000	640	6675	1956
CONCORD	1800	440	3706	1086
	1800	588	4942	1448
Vertical	1800	736	6177	1810
	2000	588	4375	1282
	2000	736	5471	1603
	2000	884	5938	1740

	HEIGHT mm	WIDTH mm	TYPE	BauJit* £50	WATT* £50	
COMPACT WITH STYLE	300	500	K1	768	225	
	300	1000	K1	1535	450	
	300	1400	K1	2150	630	
	300	2000	K1	3071	900	
	Standard	300	500	K2	1483	435
		300	1000	K2	2965	869
		300	1400	K2	4151	1217
		300	2000	K2	5930	1738
		500	400	K1	991	290
		500	600	K1	1486	436
		500	800	K1	1982	581
		500	1000	K1	2477	726
		500	1200	K1	2973	871
		500	1400	K1	3468	1016
		500	1600	K1	3963	1162
		500	1800	K1	4459	1307
		500	2000	K1	4954	1452
		500	400	K2	1755	514
		500	600	K2	2633	772
		500	800	K2	3510	1029
		500	1000	K2	4388	1286
		500	1200	K2	5265	1543
		500	1400	K2	6143	1800
		500	1600	K2	7021	2058
		500	1800	K2	7898	2315
		500	2000	K2	8776	2572
		600	400	K1	1156	339
		600	600	K1	1734	508
		600	800	K1	2312	678
		600	1000	K1	2890	847
		600	1200	K1	3468	1016
		600	1400	K1	4046	1186
600		1600	K1	4624	1355	
600		1800	K1	5202	1525	
600		2000	K1	5780	1694	
600		400	K2	2036	597	
600	600	K2	3054	895		
600	800	K2	4073	1194		
600	1000	K2	5091	1492		
600	1200	K2	6109	1790		
600	1400	K2	7127	2089		
600	1600	K2	8145	2387		
600	1800	K2	9163	2686		
600	2000	K2	10181	2984		
COMPACT WITH STYLE	200	500	P+	824	242	
	200	1000	P+	1648	483	
	200	1400	P+	2307	676	
	200	2000	P+	3296	966	
	Lo-Line	200	500	K2	1047	307
		200	1000	K2	2095	614
200		1400	K2	2933	860	
200		2000	K2	4190	1228	
COMPACT WITH STYLE	1600	300	P2	2412	707	
	1600	500	P2	3624	1062	
	1600	600	P2	4190	1228	
	Vertical	1800	300	P2	2678	785
		1800	500	P2	4026	1180
		1800	600	P2	4654	1364
		2000	300	P2	2941	862
		2000	500	P2	4419	1295
		2000	600	P2	5111	1498
		2400	300	P2	3450	1011
		2400	500	P2	5186	1520
		2400	600	P2	5995	1757

	HEIGHT mm	WIDTH mm	TYPE	BauJit* £50	WATT* £50
PLANAR	300	500	K1	800	235
	300	1000	K1	1600	469
	300	1400	K1	2240	657
	300	2000	K1	3200	938
	300	500	K2	1585	465
	300	1000	K2	3170	929
	300	1400	K2	4438	1301
	300	2000	K2	6339	1858
	400	400	K1	854	250
	400	600	K1	1282	376
	400	800	K1	1709	501
	400	1000	K1	2136	626
	400	1200	K1	2563	751
	400	1400	K1	2990	876
	400	1600	K1	3417	1002
	400	1800	K1	3845	1127
	400	2000	K1	4272	1252
	400	400	K2	1606	471
	400	600	K2	2410	706
	400	800	K2	3213	942
	400	1000	K2	4016	1177
	400	1200	K2	4819	1412
	400	1400	K2	5622	1648
	400	1600	K2	6425	1883
	400	1800	K2	7229	2119
	400	2000	K2	8032	2354
	500	400	K1	1056	310
	500	600	K1	1585	464
	500	800	K1	2113	619
	500	1000	K1	2641	774
	500	1200	K1	3169	929
	500	1400	K1	3697	1084
500	1600	K1	4225	1238	
500	1800	K1	4754	1393	
500	2000	K1	5282	1548	
500	400	K2	1926	564	
500	600	K2	2889	847	
500	800	K2	3851	1129	
500	1000	K2	4814	1411	
500	1200	K2	5777	1693	
500	1400	K2	6740	1975	
500	1600	K2	7703	2258	
500	1800	K2	8666	2540	
500	2000	K2	9629	2822	
600	400	K1	1243	364	
600	600	K1	1865	547	
600	800	K1	2487	729	
600	1000	K1	3108	911	
600	1200	K1	3730	1093	
600	1400	K1	4352	1275	
600	1600	K1	4973	1458	
600	1800	K1	5595	1640	
600	2000	K1	6217	1822	
600	400	K2	2230	654	
600	600	K2	3345	980	
600	800	K2	4460	1307	
600	1000	K2	5575	1634	
600	1200	K2	6690	1961	
600	1400	K2	7805	2288	
600	1600	K2	8920	2614	
600	1800	K2	10035	2941	
600	2000	K2	11150	3268	

	HEIGHT mm	WIDTH mm	TYPE	BauJit* £50	WATT* £50		
LST 2	500	650	K1	692	203		
	500	850	K1	1038	304		
	500	1050	K1	1384	406		
	Wall Mounted with Integral Kick Grille - Overall Height 500mm	500	1250	K1	1730	507	
		500	1450	K1	2076	608	
		500	1650	K1	2422	710	
		500	1850	K1	2768	811	
		500	2050	K1	3114	913	
		500	650	K2	1234	362	
		500	850	K2	1851	542	
		500	1050	K2	2468	723	
		500	1250	K2	3084	904	
		500	1450	K2	3701	1085	
		500	1650	K2	4318	1266	
		500	1850	K2	4935	1446	
	500	2050	K2	5552	1627		
	500	650	P+	989	290		
	500	850	P+	1484	435		
	500	1050	P+	1979	580		
	500	1250	P+	2474	725		
	500	1450	P+	2968	870		
	500	1650	P+	3463	1015		
	500	1850	P+	3958	1160		
	500	2050	P+	4453	1305		
	LST 2	500	650	K1	902	264	
		500	850	K1	1353	397	
		500	1050	K1	1804	529	
		Wall Mounted with 500mm Casing and Kick Grille - Overall Height 650mm	500	1250	K1	2255	661
			500	1450	K1	2706	793
			500	1650	K1	3157	925
			500	1850	K1	3609	1058
			500	2050	K1	4060	1190
500			650	K2	1557	456	
500			850	K2	2336	685	
500			1050	K2	3114	913	
500			1250	K2	3893	1141	
500			1450	K2	4671	1369	
500			1650	K2	5450	1597	
500			1850	K2	6228	1825	
500		2050	K2	7007	2054		
500		650	P+	1322	388		
500		850	P+	1984	581		
500		1050	P+	2645	775		
500		1250	P+	3306	969		
500		1450	P+	3967	1163		
500		1650	P+	4629	1357		
500		1850	P+	5290	1550		
500		2050	P+	5951	1744		
LST 2		600	650	K1	1145	336	
		600	850	K1	1718	503	
		600	1050	K1	2290	671	
		Wall Mounted with 600mm Casing and 150mm Kick Grille - Overall Height 750mm	600	1250	K1	2863	839
			600	1450	K1	3435	1007
			600	1650	K1	4008	1175
			600	1850	K1	4580	1342
			600	2050	K1	5153	1510
	600		650	K2	1904	558	
	600		850	K2	2855	837	
	600		1050	K2	3807	1116	
	600		1250	K2	4759	1395	
	600		1450	K2	5711	1674	
	600		1650	K2	6663	1953	
	600		1850	K2	7614	2232	
	600	2050	K2	8566	2511		
	600	650	P+	1574	461		
	600	850	P+	2360	692		
	600	1050	P+	3147	922		
	600	1250	P+	3934	1153		
	600	1450	P+	4721	1384		
	600	1650	P+	5508	1614		
	600	1850	P+	6294	1845		
	600	2050	P+	7081	2075		

	HEIGHT mm	WIDTH mm	TYPE	Bault® t50	WATT® t50
ELITE	300	500	KI	882	259
	300	1000	KI	1764	517
	300	1500	KI	2646	776
	300	2000	KI	3528	1034
	300	2500	KI	4410	1293
	300	3000	KI	5292	1551
	300	500	P+	1324	388
	300	1000	P+	2648	776
	300	1500	P+	3972	1164
	300	2000	P+	5295	1552
	300	2500	P+	6619	1940
	300	3000	P+	7943	2328
	300	500	K2	1726	506
	300	1000	K2	3453	1012
	300	1500	K2	5179	1518
	300	2000	K2	6906	2024
	300	2500	K2	8632	2530
	300	3000	K2	10359	3036
	450	400	PI	650	190
	450	500	PI	812	238
	450	600	PI	974	286
	450	700	PI	1137	333
	450	800	PI	1299	381
	450	900	PI	1462	428
	450	1000	PI	1624	476
	450	1200	PI	1949	571
	450	1400	PI	2274	666
	450	1600	PI	2599	762
	450	2000	PI	3248	952
	450	2400	PI	3898	1142
	450	400	KI	1048	307
	450	500	KI	1310	384
	450	600	KI	1572	461
	450	700	KI	1834	538
	450	800	KI	2096	614
	450	900	KI	2358	691
	450	1000	KI	2620	768
	450	1100	KI	2882	845
	450	1200	KI	3144	922
	450	1400	KI	3669	1075
	450	1600	KI	4193	1229
	450	1800	KI	4717	1382
	450	2000	KI	5241	1536
	450	2200	KI	5765	1690
	450	2400	KI	6289	1843
	450	2600	KI	6813	1997
	450	2800	KI	7337	2150
	450	3000	KI	7861	2304
	450	400	P+	1509	442
	450	500	P+	1887	553
	450	600	P+	2264	664
	450	700	P+	2642	774
	450	800	P+	3019	885
	450	900	P+	3396	995
	450	1000	P+	3774	1106
	450	1100	P+	4151	1217
	450	1200	P+	4528	1327
	450	1400	P+	5283	1548
	450	1600	P+	6038	1770
	450	1800	P+	6793	1991
	450	2000	P+	7547	2212
	450	2200	P+	8302	2433
	450	2400	P+	9057	2654
	450	2600	P+	9812	2876
	450	2800	P+	10566	3097
	450	3000	P+	11321	3318
	450	400	K2	1923	564
	450	500	K2	2404	705
	450	600	K2	2885	845
	450	700	K2	3365	986
	450	800	K2	3846	1127
	450	900	K2	4327	1268

	HEIGHT mm	WIDTH mm	TYPE	Bault® t50	WATT® t50
ELITE	450	1000	K2	4808	1409
	450	1100	K2	5288	1550
	450	1200	K2	5769	1691
	450	1400	K2	6731	1973
	450	1600	K2	7692	2254
	450	1800	K2	8654	2536
	450	2000	K2	9615	2818
	450	2200	K2	10577	3100
	450	2400	K2	11538	3382
	450	2600	K2	12500	3663
	450	2800	K2	13461	3945
	450	3000	K2	14423	4227
	600	400	PI	833	244
	600	500	PI	1041	305
	600	600	PI	1249	366
	600	700	PI	1457	427
	600	800	PI	1665	488
	600	900	PI	1873	549
	600	1000	PI	2081	610
	600	1200	PI	2498	732
	600	1400	PI	2914	854
	600	1600	PI	3330	976
	600	2000	PI	4163	1220
	600	2400	PI	4995	1464
	600	400	KI	1365	400
	600	500	KI	1706	500
	600	600	KI	2047	600
	600	700	KI	2388	700
	600	800	KI	2730	800
	600	900	KI	3071	900
	600	1000	KI	3412	1000
	600	1100	KI	3753	1100
	600	1200	KI	4094	1200
	600	1400	KI	4777	1400
	600	1600	KI	5459	1600
	600	1800	KI	6142	1800
	600	2000	KI	6824	2000
	600	2200	KI	7506	2200
	600	2400	KI	8189	2400
	600	2600	KI	8871	2600
	600	2800	KI	9554	2800
	600	3000	KI	10236	3000
	600	400	P+	1923	564
	600	500	P+	2404	705
	600	600	P+	2885	845
	600	700	P+	3365	986
	600	800	P+	3846	1127
	600	900	P+	4327	1268
	600	1000	P+	4808	1409
	600	1100	P+	5288	1550
	600	1200	P+	5769	1691
	600	1400	P+	6731	1973
	600	1600	P+	7692	2254
	600	1800	P+	8654	2536
	600	2000	P+	9615	2818
	600	2200	P+	10577	3100
	600	2400	P+	11538	3382
	600	2600	P+	12500	3663
	600	2800	P+	13461	3945
	600	3000	P+	14423	4227
	600	400	K2	2427	711
	600	500	K2	3033	889
	600	600	K2	3640	1067
	600	700	K2	4247	1245
	600	800	K2	4853	1422
	600	900	K2	5460	1600
	600	1000	K2	6067	1778
	600	1100	K2	6673	1956
	600	1200	K2	7280	2134
	600	1400	K2	8493	2489
	600	1600	K2	9706	2845
	600	1800	K2	10920	3200

	HEIGHT mm	WIDTH mm	TYPE	Bault® t50	WATT® t50
ELITE	600	2000	K2	12133	3556
	600	2200	K2	13346	3912
	600	2400	K2	14560	4267
	600	2600	K2	15773	4623
	600	2800	K2	16986	4978
	600	3000	K2	18200	5334
	700	400	PI	954	280
	700	500	PI	1192	350
	700	600	PI	1431	419
	700	700	PI	1669	489
	700	800	PI	1908	559
	700	900	PI	2146	629
	700	1000	PI	2385	699
	700	1200	PI	2862	839
	700	1400	PI	3339	979
	700	1600	PI	3816	1118
	700	2000	PI	4770	1398
	700	2400	PI	5724	1678
	700	400	KI	1559	457
	700	500	KI	1948	571
	700	600	KI	2338	685
	700	700	KI	2728	799
	700	800	KI	3117	914
	700	900	KI	3507	1028
	700	1000	KI	3897	1142
	700	1100	KI	4286	1256
	700	1200	KI	4676	1370
	700	1400	KI	5455	1599
	700	1600	KI	6234	1827
	700	1800	KI	7014	2056
	700	2000	KI	7793	2284
	700	2200	KI	8572	2512
	700	2400	KI	9352	2741
	700	2600	KI	10131	2969
	700	2800	KI	10910	3198
	700	3000	KI	11690	3426
	700	400	P+	2180	639
	700	500	P+	2724	799
	700	600	P+	3269	958
	700	700	P+	3814	1118
	700	800	P+	4359	1278
	700	900	P+	4904	1437
	700	1000	P+	5449	1597
	700	1100	P+	5994	1757
	700	1200	P+	6539	1916
	700	1400	P+	7629	2236
	700	1600	P+	8718	2555
	700	1800	P+	9808	2875
	700	2000	P+	10898	3194
	700	2200	P+	11988	3513
	700	2400	P+	13078	3833
	700	2600	P+	14167	4152
	700	2800	P+	15257	4472
	700	3000	P+	16347	4791
	700	400	K2	2745	804
	700	500	K2	3431	1006
	700	600	K2	4117	1207
	700	700	K2	4803	1408
	700	800	K2	5489	1609
	700	900	K2	6175	1810
	700	1000	K2	6862	2011
	700	1100	K2	7548	2212
	700	1200	K2	8234	2413
	700	1400	K2	9606	2815
	700	1600	K2	10978	3218
	700	1800	K2	12351	3620
	700	2000	K2	13723	4022
	700	2200	K2	15095	4424
	700	2400	K2	16468	4826
	700	2600	K2	17840	5229
	700	2800	K2	19212	5631
	700	3000	K2	20585	6033

	HEIGHT mm	WIDTH mm	TYPE	BauArt E50	WATT ^h E50
COMPACT	300	500	K1	882	255
	300	1000	K1	1764	509
	300	1500	K1	2646	764
	300	2000	K1	3528	1018
	300	2500	K1	4410	1273
	300	3000	K1	5292	1527
	300	500	P+	1324	373
	300	1000	P+	2648	745
	300	1500	P+	3972	1118
	300	2000	P+	5295	1490
	300	2500	P+	6619	1863
	300	3000	P+	7943	2235
	300	500	K2	1726	491
	300	1000	K2	3453	982
	300	1500	K2	5179	1473
	300	2000	K2	6906	1964
	300	2500	K2	8632	2455
	300	3000	K2	10359	2946
	450	400	PI	650	190
	450	500	PI	812	237
	450	600	PI	974	284
	450	700	PI	1137	332
	450	800	PI	1299	379
	450	900	PI	1462	427
	450	1000	PI	1624	474
	450	1200	PI	1949	569
	450	1400	PI	2274	664
	450	1600	PI	2599	758
	450	2000	PI	3248	948
	450	2400	PI	3898	1138
	450	400	K1	1048	302
	450	500	K1	1310	378
	450	600	K1	1572	454
	450	700	K1	1834	529
	450	800	K1	2096	605
	450	900	K1	2358	680
	450	1000	K1	2620	756
	450	1100	K1	2882	832
	450	1200	K1	3144	907
	450	1400	K1	3669	1058
	450	1600	K1	4193	1210
	450	1800	K1	4717	1361
	450	2000	K1	5241	1512
	450	2200	K1	5765	1663
	450	2400	K1	6289	1814
	450	2600	K1	6813	1966
	450	2800	K1	7337	2117
	450	3000	K1	7861	2268
	450	400	P+	1509	422
	450	500	P+	1887	528
	450	600	P+	2264	633
	450	700	P+	2642	739
	450	800	P+	3019	844
	450	900	P+	3396	950
	450	1000	P+	3774	1055
	450	1100	P+	4151	1161
	450	1200	P+	4528	1266
	450	1400	P+	5283	1477
	450	1600	P+	6038	1688
	450	1800	P+	6793	1899
	450	2000	P+	7547	2110
	450	2200	P+	8302	2321
	450	2400	P+	9057	2532
	450	2600	P+	9812	2743
	450	2800	P+	10566	2954
	450	3000	P+	11321	3165
	450	400	K2	1923	548
	450	500	K2	2404	686
	450	600	K2	2885	823
	450	700	K2	3365	960
	450	800	K2	3846	1097
	450	900	K2	4327	1234

	HEIGHT mm	WIDTH mm	TYPE	BauArt E50	WATT ^h E50
COMPACT	450	1000	K2	4808	1371
	450	1100	K2	5288	1508
	450	1200	K2	5769	1645
	450	1400	K2	6731	1919
	450	1600	K2	7692	2194
	450	1800	K2	8654	2468
	450	2000	K2	9615	2742
	450	2200	K2	10577	3016
	450	2400	K2	11538	3290
	450	2600	K2	12500	3565
	450	2800	K2	13461	3839
	450	3000	K2	14423	4113
	600	400	PI	833	248
	600	500	PI	1041	310
	600	600	PI	1249	371
	600	700	PI	1457	433
	600	800	PI	1665	495
	600	900	PI	1873	557
	600	1000	PI	2081	619
	600	1200	PI	2498	743
	600	1400	PI	2914	867
	600	1600	PI	3330	990
	600	2000	PI	4163	1238
	600	2400	PI	4995	1486
	600	400	K1	1365	392
	600	500	K1	1706	490
	600	600	K1	2047	588
	600	700	K1	2388	686
	600	800	K1	2730	784
	600	900	K1	3071	882
	600	1000	K1	3412	980
	600	1100	K1	3753	1078
	600	1200	K1	4094	1176
	600	1400	K1	4777	1372
	600	1600	K1	5459	1568
	600	1800	K1	6142	1764
	600	2000	K1	6824	1960
	600	2200	K1	7506	2156
	600	2400	K1	8189	2352
	600	2600	K1	8871	2548
	600	2800	K1	9554	2744
	600	3000	K1	10236	2940
	600	400	P+	1923	538
	600	500	P+	2404	673
	600	600	P+	2885	807
	600	700	P+	3365	942
	600	800	P+	3846	1076
	600	900	P+	4327	1211
	600	1000	P+	4808	1345
	600	1100	P+	5288	1480
	600	1200	P+	5769	1614
	600	1400	P+	6731	1883
	600	1600	P+	7692	2152
	600	1800	P+	8654	2421
	600	2000	P+	9615	2690
	600	2200	P+	10577	2959
	600	2400	P+	11538	3228
	600	2600	P+	12500	3497
	600	2800	P+	13461	3766
	600	3000	P+	14423	4035
	600	400	K2	2427	693
	600	500	K2	3033	866
	600	600	K2	3640	1039
	600	700	K2	4247	1212
	600	800	K2	4853	1386
	600	900	K2	5460	1559
	600	1000	K2	6067	1732
	600	1100	K2	6673	1905
	600	1200	K2	7280	2078
	600	1400	K2	8493	2425
	600	1600	K2	9706	2771
	600	1800	K2	10920	3118

	HEIGHT mm	WIDTH mm	TYPE	BauArt E50	WATT ^h E50
COMPACT	600	2000	K2	12133	3464
	600	2200	K2	13346	3810
	600	2400	K2	14560	4157
	600	2600	K2	15773	4503
	600	2800	K2	16986	4850
	600	3000	K2	18200	5196
	700	400	PI	954	286
	700	500	PI	1192	358
	700	600	PI	1431	429
	700	700	PI	1669	501
	700	800	PI	1908	572
	700	900	PI	2146	644
	700	1000	PI	2385	715
	700	1200	PI	2862	858
	700	1400	PI	3339	1001
	700	1600	PI	3816	1144
	700	2000	PI	4770	1430
	700	2400	PI	5724	1716
	700	400	K1	1559	447
	700	500	K1	1948	559
	700	600	K1	2338	670
	700	700	K1	2728	782
	700	800	K1	3117	894
	700	900	K1	3507	1005
	700	1000	K1	3897	1117
	700	1100	K1	4286	1229
	700	1200	K1	4676	1340
	700	1400	K1	5455	1564
	700	1600	K1	6234	1787
	700	1800	K1	7014	2011
	700	2000	K1	7793	2234
	700	2200	K1	8572	2457
	700	2400	K1	9352	2681
	700	2600	K1	10131	2904
	700	2800	K1	10910	3128
	700	3000	K1	11690	3351
	700	400	P+	2180	612
	700	500	P+	2724	765
	700	600	P+	3269	918
	700	700	P+	3814	1071
	700	800	P+	4359	1224
	700	900	P+	4904	1377
	700	1000	P+	5449	1530
	700	1100	P+	5994	1683
	700	1200	P+	6539	1836
	700	1400	P+	7629	2142
	700	1600	P+	8718	2448
	700	1800	P+	9808	2754
	700	2000	P+	10898	3060
	700	2200	P+	11988	3366
	700	2400	P+	13078	3672
	700	2600	P+	14167	3978
	700	2800	P+	15257	4284
	700	3000	P+	16347	4590
	700	400	K2	2745	784
	700	500	K2	3431	981
	700	600	K2	4117	1177
	700	700	K2	4803	1373
	700	800	K2	5489	1569
	700	900	K2	6175	1765
	700	1000	K2	6862	1961
	700	1100	K2	7548	2157
	700	1200	K2	8234	2353
	700	1400	K2	9606	2745
	700	1600	K2	10978	3138
	700	1800	K2	12351	3530
	700	2000	K2	13723	3922
	700	2200	K2	15095	4314
	700	2400	K2	16468	4706
	700	2600	K2	17840	5099
	700	2800	K2	19212	5491
	700	3000	K2	20585	5883